


FRONT INTERMEDIATE CROSSMEMBER




REAR SPRING FRONT CROSSMEMBER




REAR SPRING REAR CROSSMEMBER

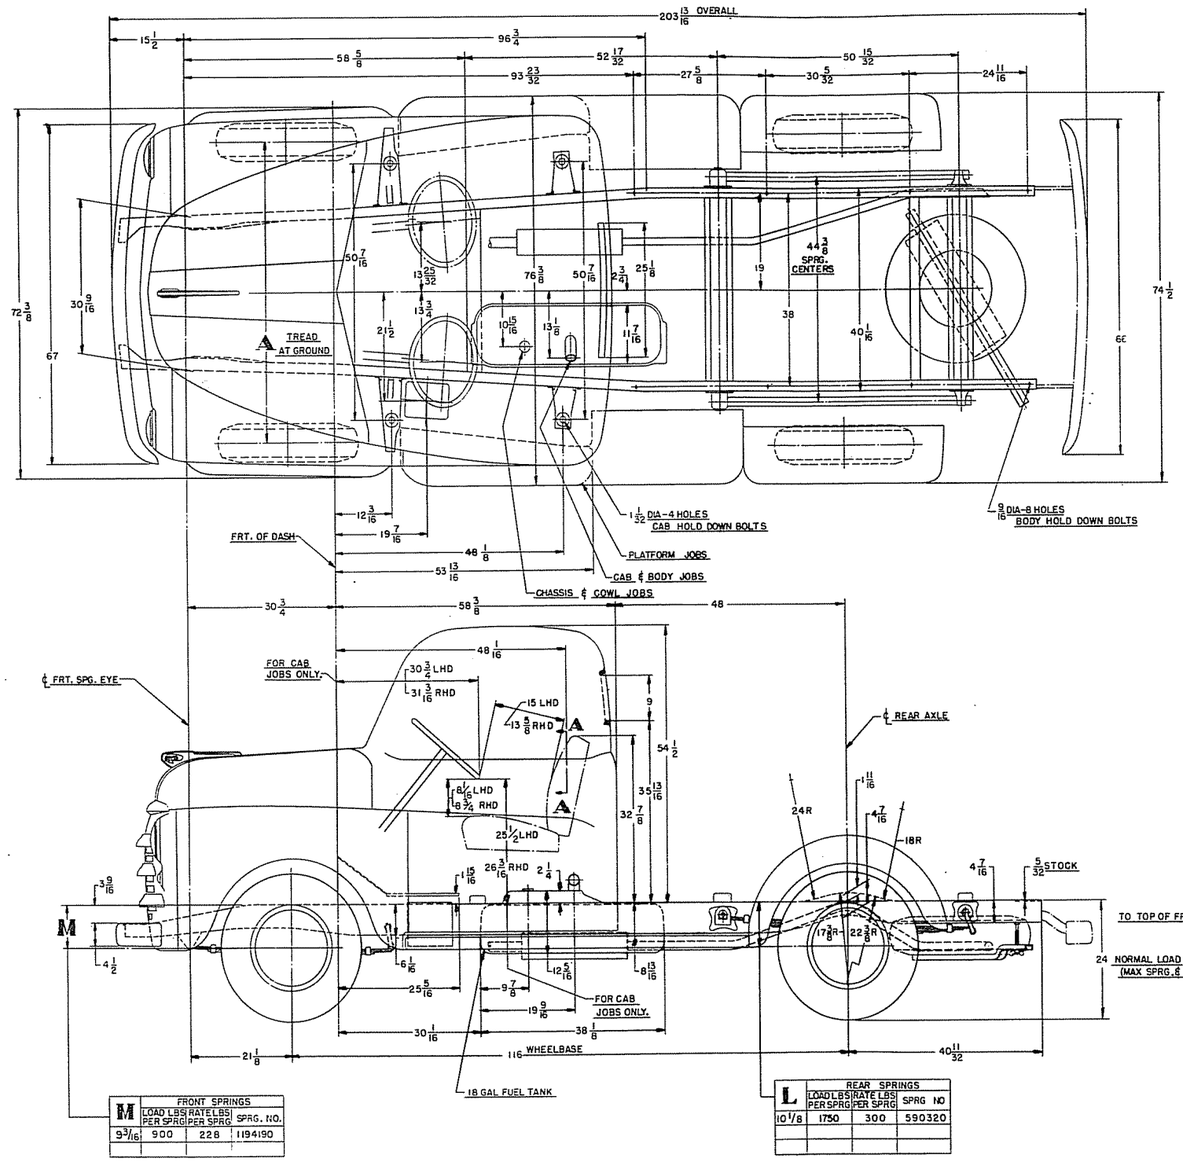


| M | FRONT SPRINGS | | |
|---|---|---|---|
| | LOAD LBS PER SPRG | RATE LBS PER SPRG | SPRG. NO. |
| 9 3/16 | 900 | 228 | 1194190 |
| | | | |

| L | REAR SPRINGS | | |
|---|---|---|---|
| | LOAD LBS PER SPRG | RATE LBS PER SPRG | SPRG NO |
| 10 1/8 | 1750 | 300 | 590320 |
| | | | |

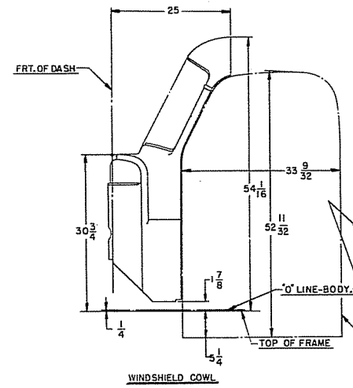


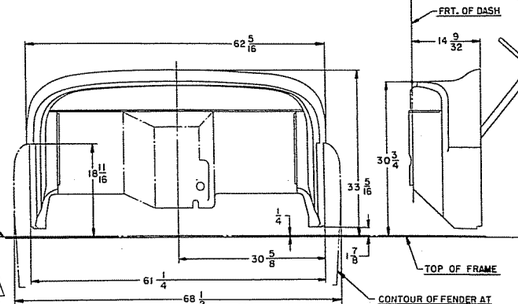





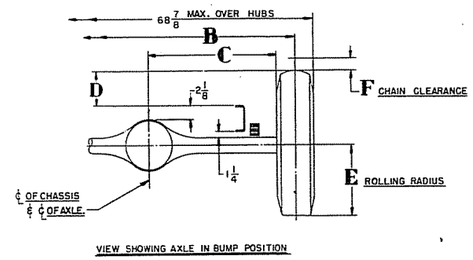


VIEW SHOWING AXLE IN BUMP POSITION

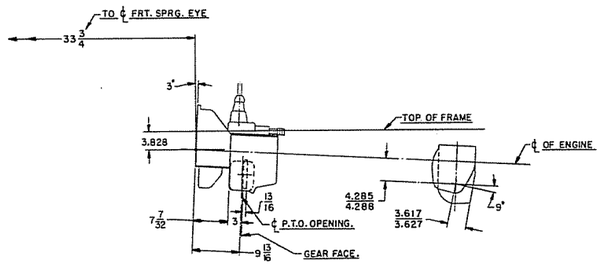


4 SPEED TRANSMISSION (EX. EQ.)
P.T.O. OPENING S.A.E. STD. LARGE ON R.H. SIDE
GEAR: TRANS. DRIVE 36 T. - 7P. - 22 1/2 P.A.
SPEED RATIO: 395 R.P.M. TO 1000 R.P.M.
ROTATION: OPPOSITE ENGINE
ENGINE SPEED GOVERNED AT 3000 R.P.M.




| TIRES FRONT & REAR | RIM SIZE | A | B | C | D | E | F |
|---|---|---|---|---|---|---|---|
| AIRWHEEL 15 6P | 15X5.50 | 58 9/16 | 61 1/4 | 26.68 | 7 13/32 | 13.84 | 3 1/2 |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

**BODY BUILDERS LAYOUT**
**116" W.B.—C-116**